
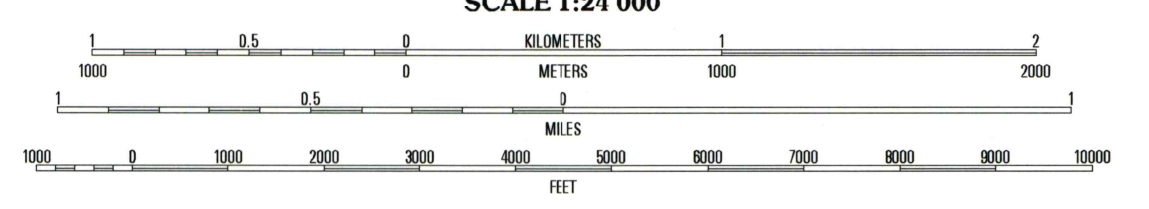


Produced by the United States Geological Survey
 Topography compiled 1945. Planimetry derived from imagery
 taken 1994 and other sources. Public Land Survey System and
 survey control current as of 1997.
 Selected hydrographic data from NOS Chart 11467 (1987).
 This information is not intended for navigational purposes.
 North American Datum of 1983 (NAD 83). Projection and
 1 000-meter grid: Universal Transverse Mercator, zone 17.
 2 500-meter ticks: Florida Coordinate System of 1983 (east zone).
 North American Datum of 1927 (NAD 27) is shown by dashed
 corner ticks. The values of the shift between NAD 83 and
 NAD 27 for 7.5-minute intersections are obtainable from
 National Geodetic Survey NADCON software.
 There may be private inholdings within the boundaries of the
 National or State reserves shown on this map.
 Landmark buildings verified 1987.



CONTOUR INTERVAL 5 FEET
 NATIONAL GEODETIC VERTICAL DATUM OF 1929
 TO CONVERT FROM FEET TO METERS, MULTIPLY BY 0.3048
 DEPTH CURVES AND SOUNDINGS IN FEET, DATUM IS MEAN LOWER LOW WATER
 THE RELATIONSHIP BETWEEN THE TWO DATUMS IS VARIABLE

ROAD CLASSIFICATION

Primary highway	Light-duty road, hard or improved surface
Secondary highway	Unimproved road
Interstate Route	U.S. Route
	State Route

1	2	3	1 Opa-locka
4	5	4	2 North Miami
6	7	5	3 Hialeah
		6	5 South Miami
		7	7 Key Biscayne
		8	

MIAMI, FL
 1994
 NIMA 4935 I SW-SERIES 1847

